



	E T L	EQUIPAGGIAMENTI TECNICI LAVAGGIO	ATTACCO RAPIDO A GHIERA QUICK COUPLING WITH NUT AR5 2 O-RING	(I) (GB)	5 01
					16/04/14



SPECIFICHE TECNICHE
SPECIFICATIONS

- PRESSIONE NOMINALE RATED PRESSURE	250 bar – 25 MPa (3650 psi)
- PRESSIONE CONSENTITA PERMISSIBLE PRESSURE	280 bar – 28 MPa (4050 psi)
- PORTATA MASSIMA MAX FLOW RATE	40 l/min (10.5 USG p.m.)
- TEMPERATURA MASSIMA MAX WORKING TEMPERATURE	160° C (320 °F)
- MATERIALE MATERIAL	GIRELLO IN PLASTICA ANTIURTO E GUARNIZIONI OR IN VITON. BODY IN SHOCKPROOF PLASTIC AND VITON O-RING

MISURE D'INGOMBRO
OVERALL DIMENSIONS

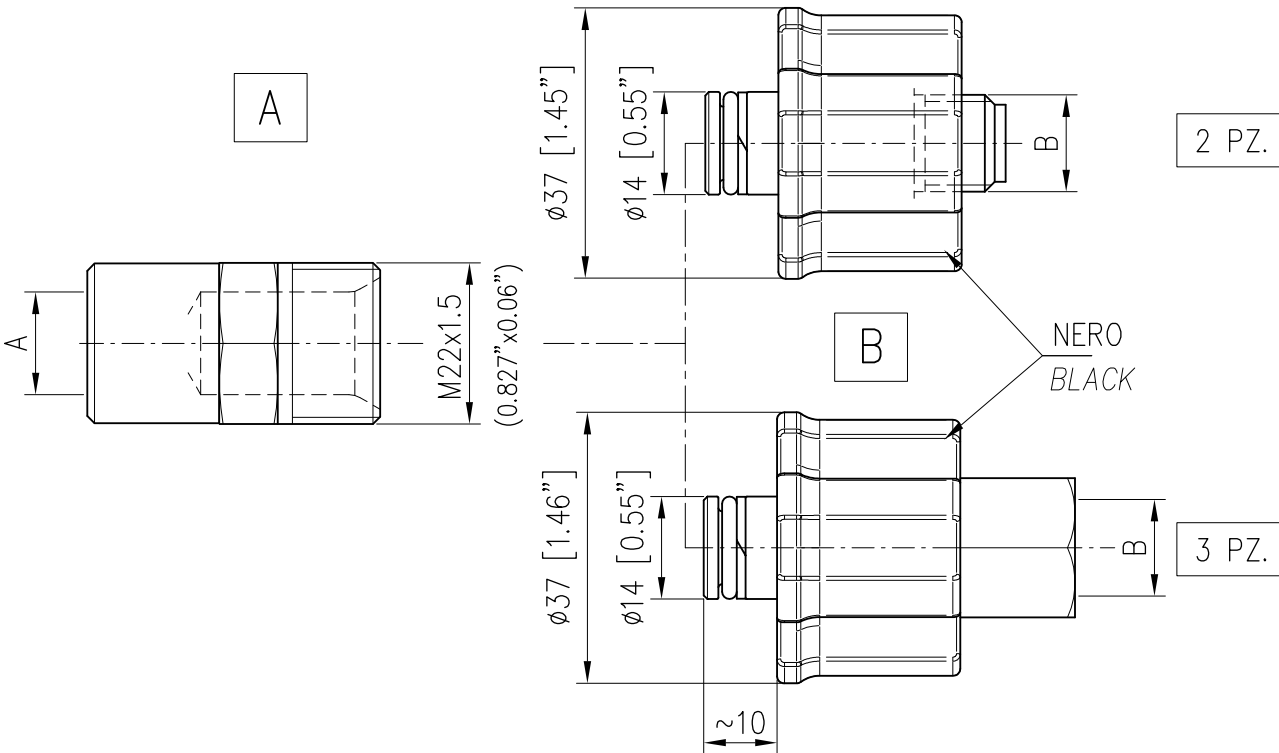

NERO
BLACK

~ 10

~ 9

CODICE CODE	A
26.1019.31	G3/8M
26.1020.31	G1/4M
26.1032.31	G1/4F
26.1037.31	G3/8F

CODICE CODE	B
26.1028.00	G1/4F
26.1035.00	G3/8M

CODICE CODE	B # PERNO GIREVOLE ROTATING PIN	
2 PZ.	26.1025.00	G1/4M-INOX
	26.1029.00	G1/4M
3 PZ.	26.1033.00	G3/8F
	26.1034.00	G3/8M
	26.1034.20	G1/4F
	26.1034.50	G1/4M

2 PZ.

3 PZ.